

Bid Submission Form

2517 Four Seasons Rd, Benzonia, 49616

Roof Replacement

\$\$\$\$

Due By:

7/24/2019

8:00 AM

MATERIALS	\$
LABOR	\$

TOTAL

\$

**Estimate of Total Time to
Complete Project**

Could start project on:

Company Name:

Address:

Email:

Phone #

Contact Person:

Tribal Preference may apply.

Davis-Bacon wage rates are applicable to all contracts over \$2000

Please return to: Heather Marshall, Inventory Specialist, Grand Traverse Band Housing Dept
Heather.Marshall@gtbindians.com, 231-534-7804



Grand Traverse Band of Ottawa and Chippewa Indians

Housing Department
2605 N West Bay Shore Drive
Peshawbestown MI 49682

Office: (231) 534-7800

Fax: (231) 534-7025



SCOPE OF WORK

Benzie LI #1

2517 Four Seasons Rd, Benzonia, 49616

****Contractor to provide ALL materials.**

Roof Replacement

- Remove and dispose of existing shingles, underlayment and drip edge
- Provide and install new metal drip edge, ice shield and synthetic underlayment over entire roof deck. **see note 1
- Provide and install approximately 24 sq of high wind rated architectural shingles.
- Remove siding from wall to roof areas.
- Provide and install ice shield to extend a minimum of 18" from vertical wall onto roof deck and to extend from roof deck to soffit on vertical wall surface. **see note 2
- Provide and install metal step flashing not less than 4" in height and 4" in width to direct water away from vertical sidewall onto roof deck or into gutter.

General & Misc

- Contractor responsible for all waste/debris removal.
- All work to be performed in accordance w/current building codes
- Any/All change orders or deviations from this scope of work must be approved in writing by program director/Asst Housing Manager AND Maintenance Supervisor before work is performed.
- Contractor to provide an estimated completion date upon acceptance of contract.
- Call Adam at 231-866-1290 to schedule appointment to look at this unit.

Note 1

Ridge vent



Min 2" gap



High wind
Architectural
Shingles




synthetic
underlayment




ice shield
136
at snowline

Rock
dack

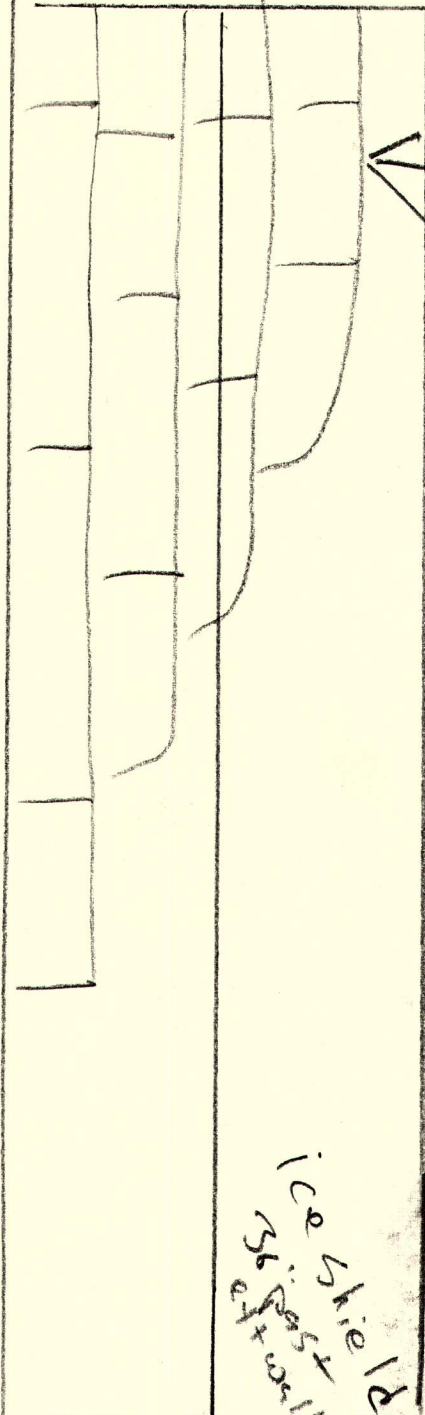

NOTE #1 dia. #1

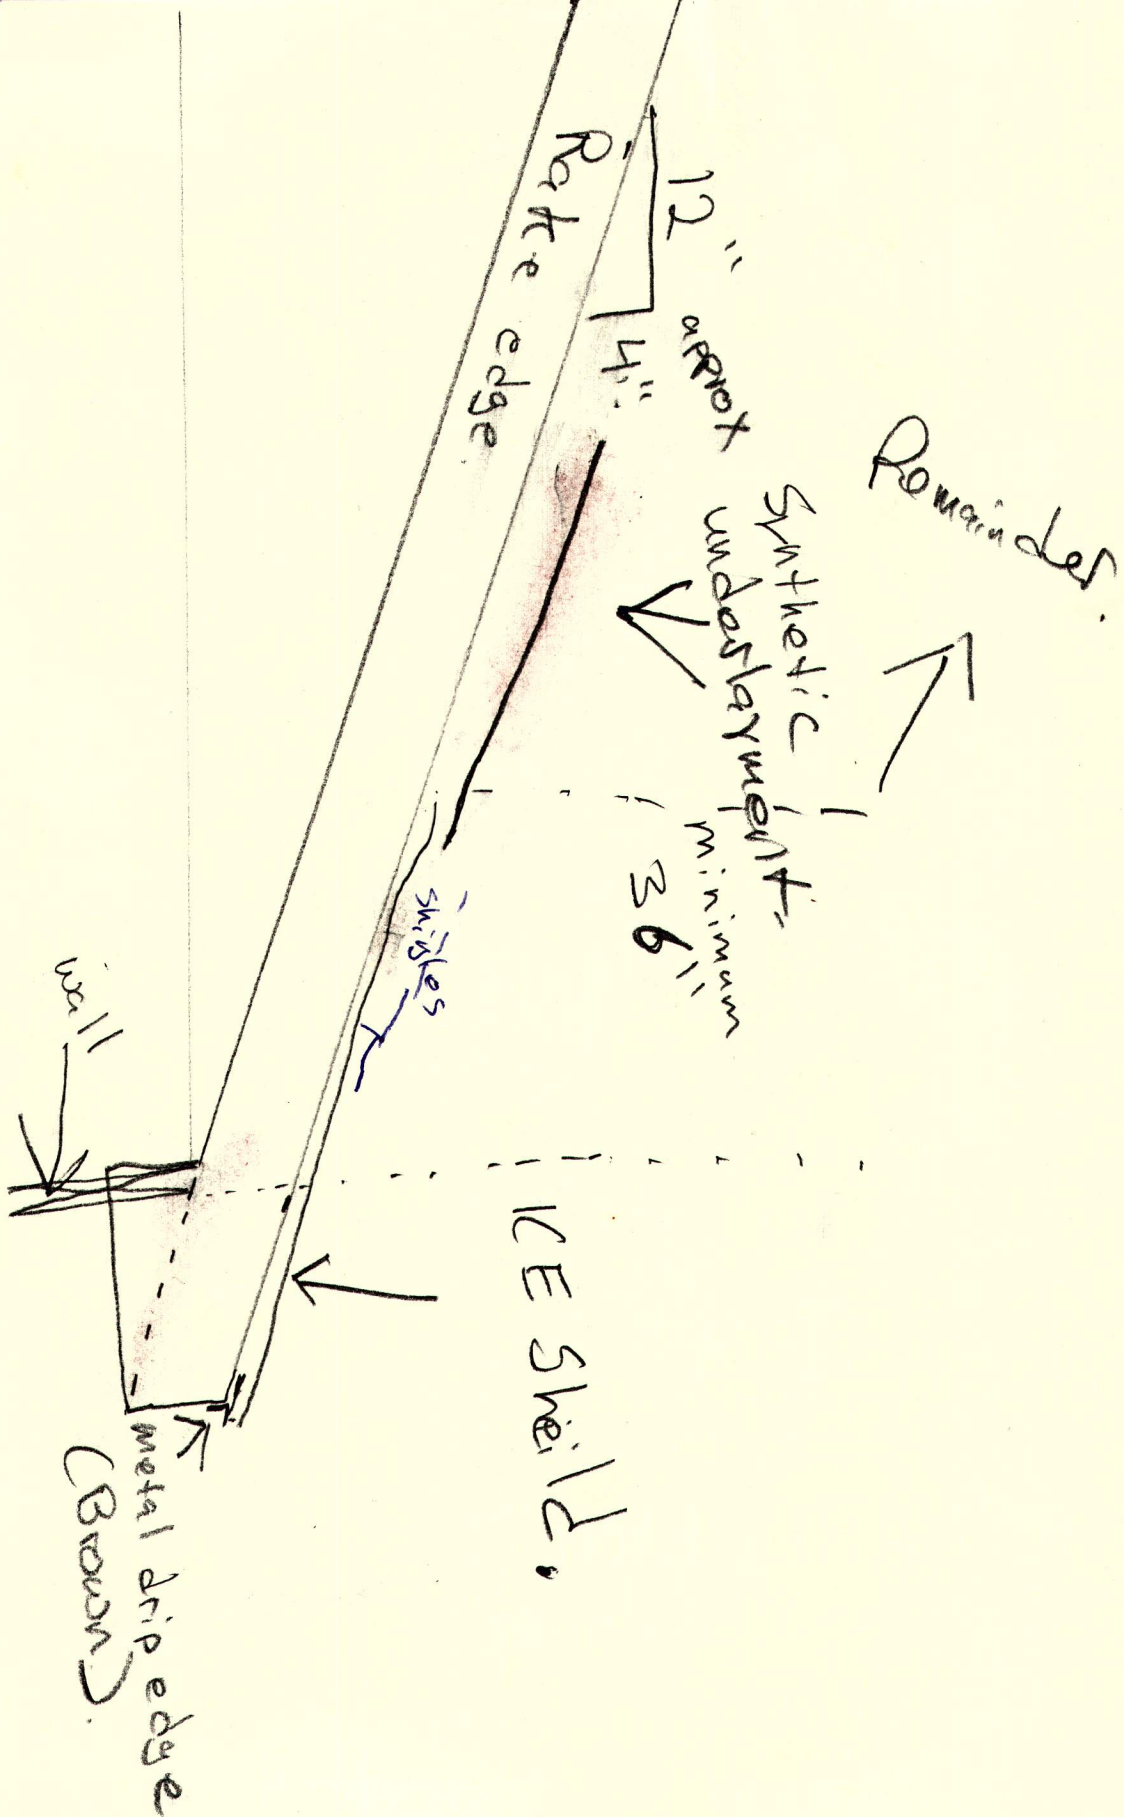

Note #2 - Dia. #2.

